



PAVEMENT MARKING DETAIL
N.T.S.

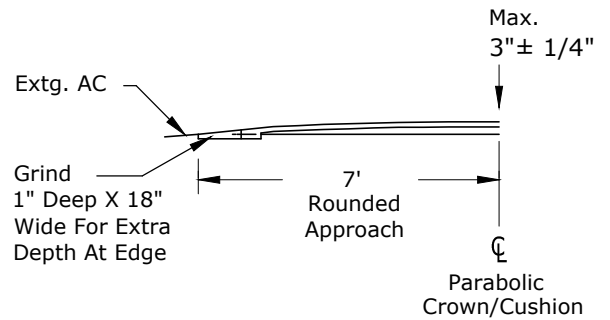

SECTION VIEW A - A
Symetrical About CL
N.T.S.

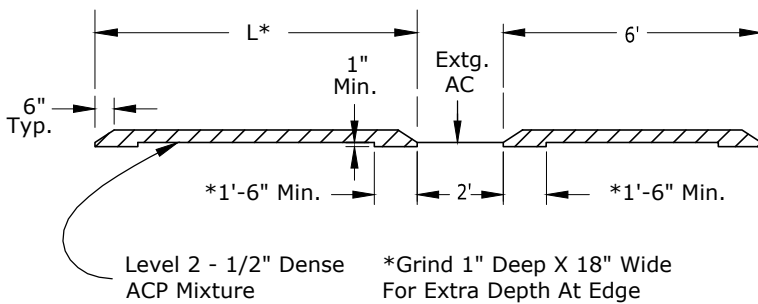

SECTION VIEW B - B
N.T.S.

GENERAL NOTES:

1. Asphalt Shall Be Rolled For Compaction Per Specifications. Finish Edges By Applying Tackcoat & Sand Sweepings.
2. Signs May Be Req'd At The Direction Of The Engineer.
3. Cushion Shall Not Be Placed On Road Grades Greater Than 8%.
4. Pavement Markings Shall Be White Type B - Preformed Fused Thermoplastic Film.

* Do Not Install If L* Is Less Than 4'

ASPHALTIC CONCRETE
SPEED CUSHION DETAILS



WASHINGTON COUNTY
DEPARTMENT OF LAND USE &
TRANSPORTATION
ENGINEERING SECTION

SPEED CUSHION
CURBED OR UNCURBED ROADWAY
SPEED 25 M.P.H. OR LESS

PLOT STAMP: 07/10/24 2:23P NOAHL
CAD: 6062.DWG

EFFECTIVE DATE: 07/01/2024

WASH. CO. # 6062