



No Parking Signs:

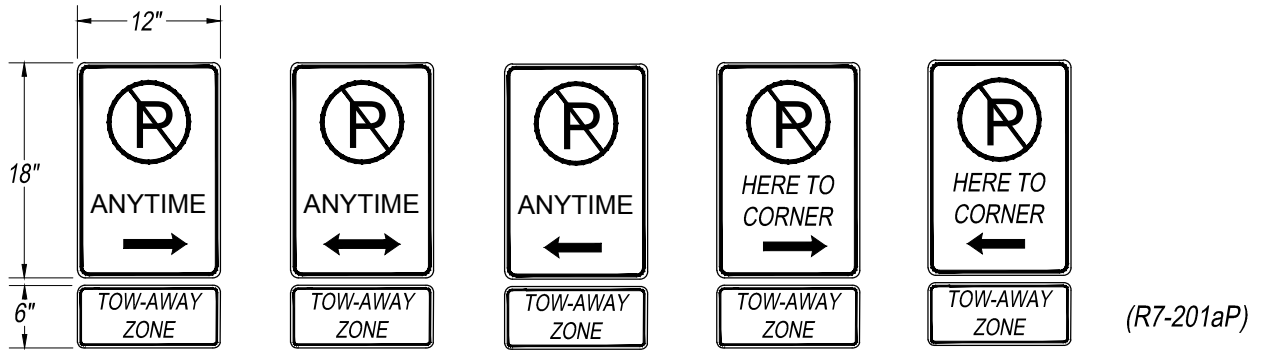

Notes:

1. "NO PARKING" signs shall be MUTCD series R7, as shown above, use County standard 12" x 18" with 12" x 6" TOW-AWAY ZONE rider.
2. When arrows are used, signs at both ends of the zone shall have single arrows pointing in the appropriate direction with double arrows in between.
3. Signs shall have red legend and border on white, except 'P' shall be black.
4. "NO PARKING" signs are to be 45° to roadway. 45° brackets are acceptable when mounted below another sign.

Speed Signs:

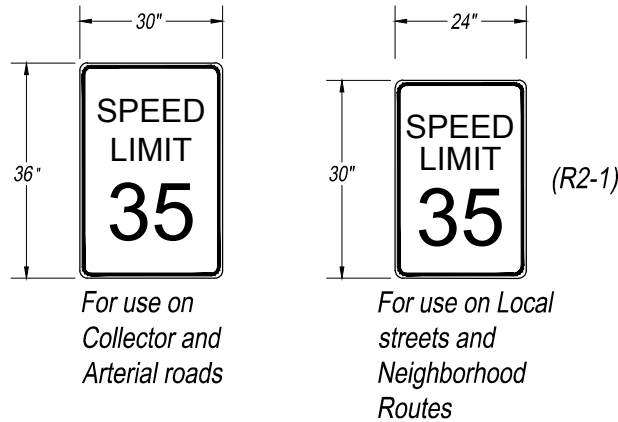

Dead End & No Outlet Signs:

Notes:

1. When Dead End or No Outlet signs are determined to be appropriate, use:
 - Dead End signs when a single street or section of road terminates having no other public street intersections
 - No Outlet signs when two or more public streets must exit at the same public street intersection
2. If W14-1a(R/L) or W14-2a(R/L) are used, these signs shall be double sided.
3. When installed on the top of a post, use W14-1a,2a signs sized:
 - 24"x6" with 8 inch tall street name signs
 - 36"x8" with 12 inch or taller street name signs



WASHINGTON COUNTY
DEPARTMENT OF LAND USE &
TRANSPORTATION
ENGINEERING SECTION

NO PARKING, SPEED, AND
DEAD END/NO OUTLET SIGNS

PLOT STAMP: 06/01/23 9:24A KYLEL
CAD: 6512.DWG

EFFECTIVE DATE: 06/01/2023

WASH. CO. # 6512