

ADA Push Button New Construction Inspection Form For RR/BM/SW

North-South Road Name

Project No.

Sheet No.


Intersection No.

Calibration Date

East-West Road Name

Corner Position Button Position

Ramp Run (RR)

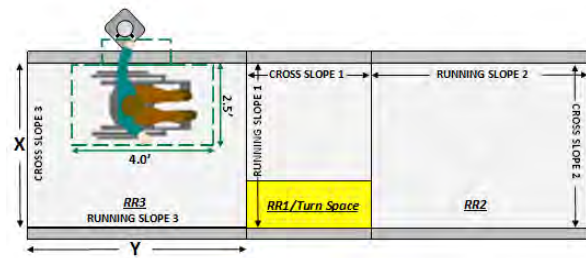

Back-In Maneuver (BM)


 For other Clear Space Surface Types, see *Exhibit "C"*.

¹ This field is only required when Surface Type is SW AND Slope X ≥ 5.0%

² Push Buttons may have a Design Exception for a parameter allowing for deviations from set standards. In such case, the functional condition is good given the other parameters are still within the defined standards.

*For Back-In Maneuver Width X ≥ 3.0 FT

Note: Pass/Fail boxes must be manually checked

PUSH BUTTON DETAILS

All fields under Push Button Details are information only fields and are not factored into functional condition.

Indicator (B, S)

B=Beacon, S=Signal

Audible Pedestrian Signal (N, PT, SM)

N=None, PT=Percussive Tone, SM=Speech Message

Locator Tone (Y, N)

Y=Yes, N=No

Signal Head (CD, N, PIC, TXT)

CD=Countdown, N=None, PIC=Pictogram, TXT=Text

Button Type (H, O, S)

H=H-Frame, O=Other, S=Standard

Arrow Surface (FS, N, TC, VB)

FS=Flush, N=None, TC=Tactile, VB=Vibrotactile


CLEAR SPACE DETAILS

All fields under Clear Space Details are required fields and are factored into functional condition.

Surface Type (BM, RR, SW)

BM = Back-In Maneuver, RR=Ramp Run, SW=Sidewalk

	Pass	Fail
Reach Range (Ft.)	≤ 0.83'	> 0.83'
Height (Ft.)	3.5' - 4.0'	< 3.5' or > 4.0'
Width X (Ft.)	≥ 2.5'*	< 2.5'*
Length Y (Ft.)	≥ 4.0'	< 4.0'
Slope X	≤ 2.0%	> 2.0 %
Slope Y	≤ 2.0%	> 2.0 %
Slope of Road¹		

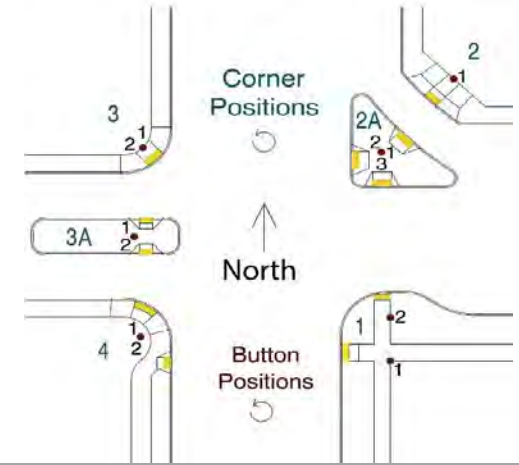

PE Stamp
(required for private development)

Comments:

Inspector's Signature

Date (mm/dd/yy)

Print name clearly

Certification No.

Company/Agency

Attached photos must be in .pdf format in order to be placed